


acoustic underlay | REGUPOL 4515

Recommended for use under	Wood Laminate Ceramic Tiles Vinyl Sheet (4515-S 3mm thick)
Material	PUR foam and cork, bound with polyurethane
Thickness	4.5mm (4515-S 3mm thick)
Width	1000mm
Roll Length	20m
Application	Residential, Commercial
Installation	Floating or Glue down
Environmental	Good Environmental Choice Australia ISO14001 PVC free
Acoustic dB reduction (compared to bare concrete floor)	14mm Wood with Regupol (glued) 17 dB 8mm Laminate with Regupol (floating) 19 dB 10mm Ceramic Tile with Regupol 17 dB 2mm Vinyl Sheet with Regupol 4515-S 3mm 17 dB


Homogeneous Vinyl Sheet

Wet or Dry Areas

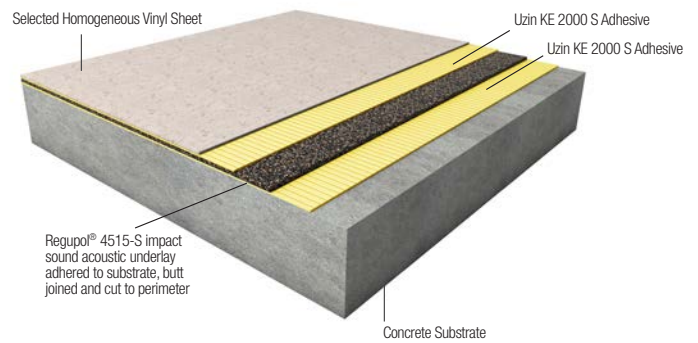


Ceramic / Porcelain Floor Tiles

Wet Areas

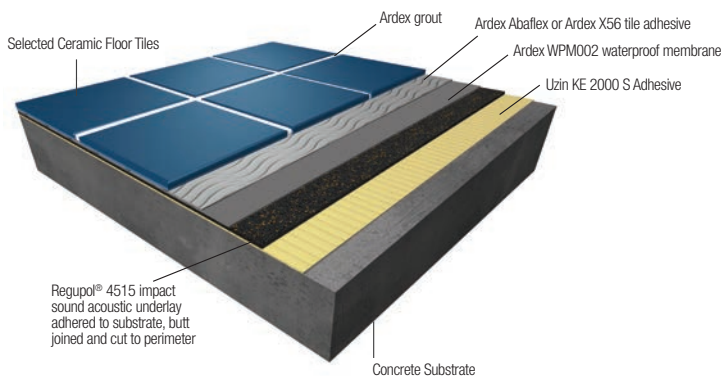


Wood Flooring

Glue Down Installation

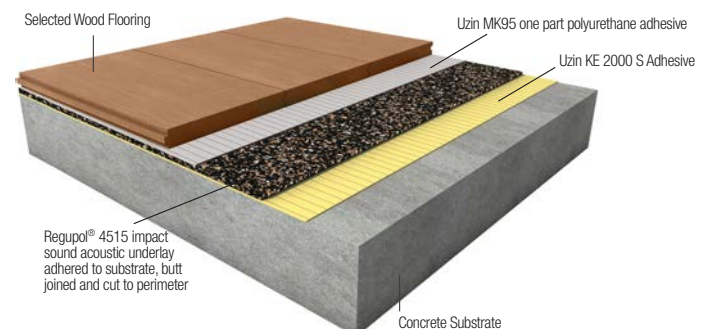

Dry Areas

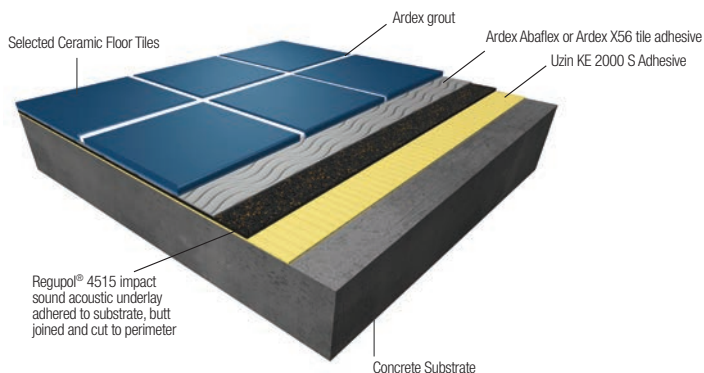

Wood or Laminate Flooring

Floating Installation

