



Applications



Technical Data

Characteristic	Standard
Construction	Solid Vinyl Tile
Surface Treatment	Urethane coating with ceramic bead particles
Overall Thickness	EN ISO 24346 2.5mm
Wear Layer Thickness	EN ISO 24340 0.70mm
Residual Indentation	EN ISO 24343-1 Pass
Dimensional Stability	EN ISO 23999 Pass
Colour Fastness to Light	ATSM F1515 Pass
Castor Chair Test	EN ISO 4918 No Change
Critical Radiant Flux	EN ISO 9239-1 7.4 kW/m ²
Chemical Resistance	No Change
Slip Resistance	Dependent on surface finish - see below.
Acoustic Impact Sound Reduction	14dB
Environmental	Phthalate Free Low VOC Declare - SVHC Free

Size & Packaging / Slip Resistance Value


	Size (mm)	Tiles Per Pack	m ² Per Pack	SRV
Shipwright	1222 x 200	12	2.93	38
Alpine Ridge				41
Loftwood	1524 x 228.6	10	3.48	38
Coventry				41
Dockside				38
Mini Plank	609.6 x 101.6	36	2.23	*
Midtown	609.6 x 609.6	9	3.34	41
Highland Step	914.4 x 457.2	8	3.34	37

* Same as Alpine Ridge and Shipwright 1222 x 200mm size

Benefits

- Declare - SVHC free
- Four-sided micro bevel
- Glue down installation
- Extra heavy duty wear layer
- Mini plank available for additional design work such as herringbone, chevron, basketweave.
- Can be installed in kitchens and bathrooms


1222 x 200mm

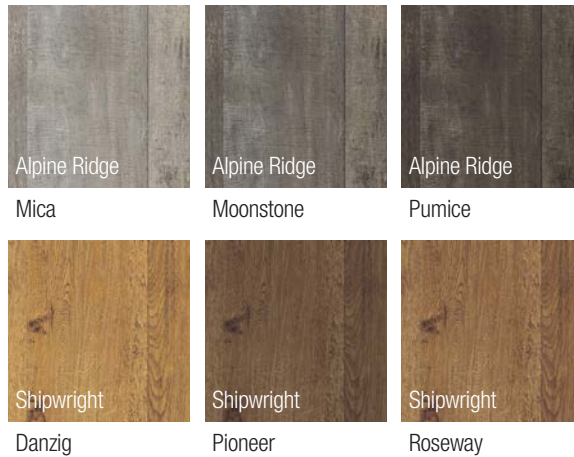

1524 x 228.6mm



609.6 x 101.6mm Mini Plank

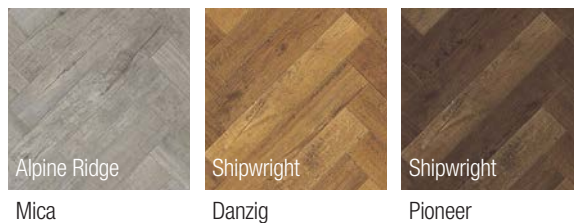

609.6 x 609.6mm



914.4 x 457.2mm

