


Specifications	Jacobsen Acoustiwall	Shaw Pixel* & Shaw Pacific		Tarkett iQ Optima	Tarkett Eclipse Premium Spirit	Tarkett Primo Premium
		Ecoworx	Ecologix			
SIZE	1.22 x 25LM	610 x 610mm	610 x 610mm	2m x 25LM	2m x 23LM	2m x 23LM
PACK	Roll	12 tiles (4.46m <sup>2</sup> )	12 tiles (4.46m <sup>2</sup> )	Roll	Roll	Roll
THICKNESS	10-12mm	5.3mm	9.0mm	2mm	2mm	2mm
FIRE RESISTANCE	ISO 9705 Group 1-S	ISO 9239-1:2010 CRF 5.8 kW/m <sup>2</sup>	ISO 9239-1:2010 CRF 7.7 kW/m <sup>2</sup>	ISO 9239-1:2010 CRF 9.5 kW/m <sup>2</sup>	ISO 9239-1:2010 CRF ≥ 11 kW/m <sup>2</sup>	ISO 9239-1:2010 CRF 10.4 kW/m <sup>2</sup>
ACOUSTIC	ISO 11654 NRC 0.40	ISO 717-2:2013 26dB	ISO 717-2:2013 33dB	N/A	N/A	N/A
ENVIRONMENTAL	ISO 14001 Green Tag Level A Green Tag Phd Declare Red List Free	ISO 14001 GECA Declare - LBC Compliant Cradle to Cradle - Silver	ISO 14001 GECA Declare - LBC Red List Approved Cradle to Cradle - Bronze	ISO 14001 Green Tag Level A Phthalate Free Best Practice PVC	ISO 14001 Green Tag Level A Phthalate Free Best Practice PVC	ISO 14001 Green Tag Level A Phthalate Free Best Practice PVC

\* Recommended install for Pixel carpet tile is "quarter turn"  
Refer to website for installation information [www.jacobsen.co.nz](http://www.jacobsen.co.nz)

Jacobsen Acoustiwall

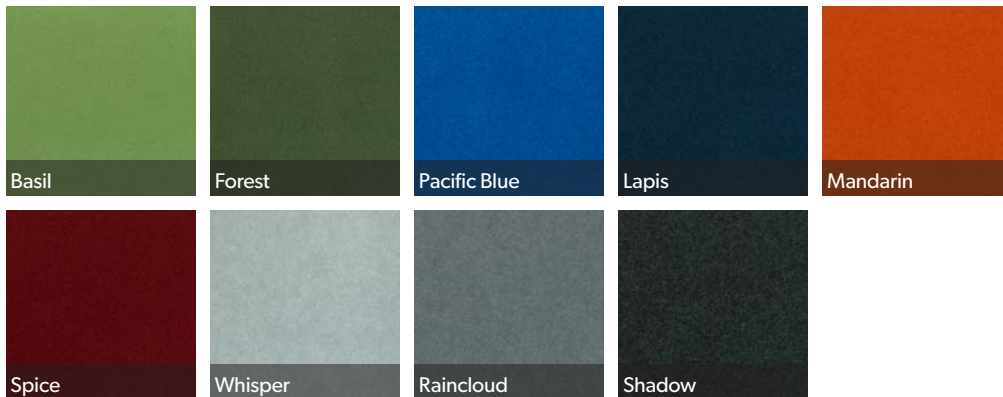

Shaw Carpet Tile | All colours available on Ecoworx or Ecologix cushion backing



Tarkett Vinyl

