




Applications



Technical Data

Characteristic	Standard	
Construction	ATSM F1700	LVT Class III, Type B
Surface Treatment	ExoGuard™	
Overall Thickness	EN ISO 24346	5.5mm
Wear Layer Thickness	EN ISO 24340	0.51mm
Residual Indentation	ATSM F1914	Pass
Dimensional Stability	EN ISO 23999	Pass
Colour Fastness to Light	ATSM F1515	Pass
Castor Chair Test	EN ISO 4918	No Change
Critical Radiant Flux	EN ISO 9239-1	6.5 kW/m ²
Chemical Resistance	ATSM F925	Pass
Slip Resistance	AS 4586:2013	SRV 37
Acoustic Impact Sound Reduction	ASTM E492	21dB

Structure

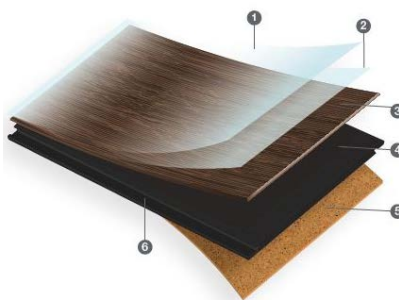

- 1. ExoGuard Finish**
Added protection against scratching, staining and abrasion
- 2. Clear 0.51mm Wear Layer**
Protects against premature product aging
- 3. High-Resolution Image**
Creates a stunning visual with depth, it is laminated directly to the COREtec XRC core
- 4. COREtec XRC Extruded Core**
Waterproof and dimensionally stable, with a density of 1900-2000 kg/m³, the rigid core protects the top layers from indentation
- 5. Attached Cork Underlayment**
Provides added sound dampening from foot traffic and floor to floor sound transfer.
- 6. Integrated Locking Edge**
Eliminates the need for wet adhesives, floating installation limits floor prep and eliminates telegraphing.

Size & Packaging

	Size (mm)	Tiles Per Pack	m ² Per Pack
Planks	1220 x 182 (W/L: 0.51 / 55mm)	12	2.66
Tiles	470 x 610 (W/L: 0,51 / 5.5mm)	10	2.87

Benefits

- Excellent acoustic reduction - 21dB
- Can be installed glue down or floating
- Mini micro bevelled edge
- Fast installation - with limited floor preparation
- Immediate occupancy after installation
- Can be installed in residential kitchens and bathrooms

Concrete



Forged V2




Misty Quart V2




Tempered V3

Composed



Bison V2




Buckeye V4




Cascade V3




Chalet V2



Grand Teton V4



Spice V4



Stoney Oak V3

Variation Guide

- V1 Uniform
- V2 Slight
- V3 Moderate
- V4 Substantial

Refer to Variation Guide sheets for in-situ images